

# Man O War

## Jellyfish® Filter – Membrane Filtration

Highly effective high-flow sediment removal



The Man O War (MOW) Jellyfish® Filter offers the proven performance of the traditional Jellyfish® Filter in a cost-effective system. Designed for flows up to 12.5 L/sec, the MOW is especially suited to South Island conditions. The Man O War material is made from Polypropylene, making it lightweight but strong.

### Key Advantages;

- Lightweight for installation
- Very high TSS removal
- Low driving head (as little as 150 mm)
- Reusable cartridges
- No replaceable media

### KEY FEATURES & BENEFITS:

- **Proven Technology** – Matches the trusted performance of the traditional Jellyfish® Filter.
- **Regulatory Compliance** – Helps meet local and national stormwater standards.
- **Lightweight** – Lightweight modular components are easier to handle around the site, and the contractor can meet the specified depth on site.
- **Space Efficiency** – Compact footprint, easier installation in constrained sites.
- **Durability** – Long-term performance with routine maintenance.

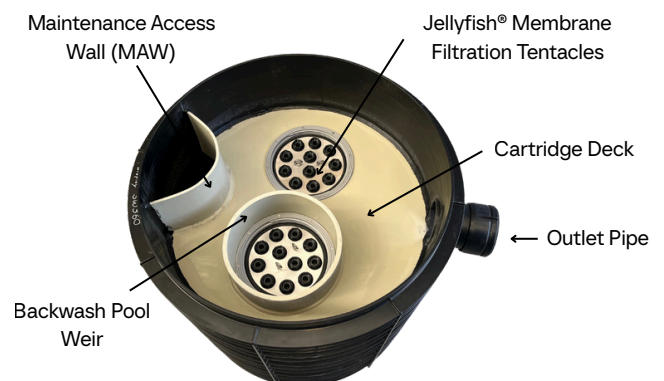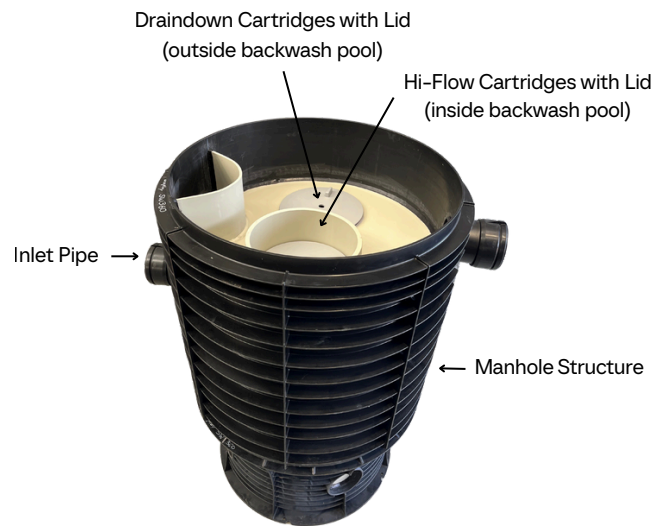

### COMPETITIVE ADVANTAGE

- **Cost-Effective** – Lower cost than concrete-based treatment systems.
- **Lightweight** – Lighter weight for handling and safer compared to concrete alternative.
- **Retrofit Ready** – Can be integrated into existing drainage infrastructure.
- **South Island Fit** – Ideal for local conditions.

Nothing in this brochure should be construed as an expressed warranty or an implied warranty of merchantability or fitness for any particular purpose. See the Stormwater360 standard quotation or acknowledgement for applicable warranties and other terms and conditions of sale.

## TECHNICAL SPECIFICATIONS

- **27" Cartridge Option**
  - Reduced installation depth and reduced excavation costs.
  - Ideal for sites with high water tables.
  - Treats up to 6.3 L/s or 5330m<sup>2</sup> impervious area in Christchurch.
- **54" Cartridge Option**
  - Recommended for lower and extended maintenance intervals and lower costs.
  - Higher Maximum treatable flow rate.
  - Treats up to 12.5 L/s or 10,600m<sup>2</sup> impervious area in Christchurch.
- **Transport & Installation Efficiencies**
  - Lightweight design reduces freight and installation challenges.



## IDEAL APPLICATIONS

- Private and commercial developments
- Sites with low fall and low driving head (South Island priority)



Jellyfish® Membrane Filtration Tentacles

## CONTACT DETAILS

Stormwater360

FREEPHONE:

0800 STORMWATER  
(0800 786769)

[www.stormwater360.co.nz](http://www.stormwater360.co.nz)

